


ARF 68-LED 2 / ARF 78-LED 2




Flat Recessed LED Luminaire

- Application:** "cool light" to illuminate delicate products
- Connection:** LED-transformer DC 350mA
- Lamp:** extremely long-life 3 x 1W power-LEDs, σ life 60,000 hours
- Energy efficiency:** very good, ww: 80lm/W; cw: 90lm/W
- Colour rendering:** ww: good, Ra = 85; cw: satisfactory, Ra = 70
- Special features:** low power consumption; no UV rays; accessories include spacer ring to reduce recess depth to 12mm or 13mm (ARF 78-LED 2) respectively, and mounting ring for mounting without cut-out (only ARF 68-LED 2); Outer casing made of high-tech plastic (high-temperature resistant, dimensionally stable and non-brittle) guarantees safe support even after years of use.

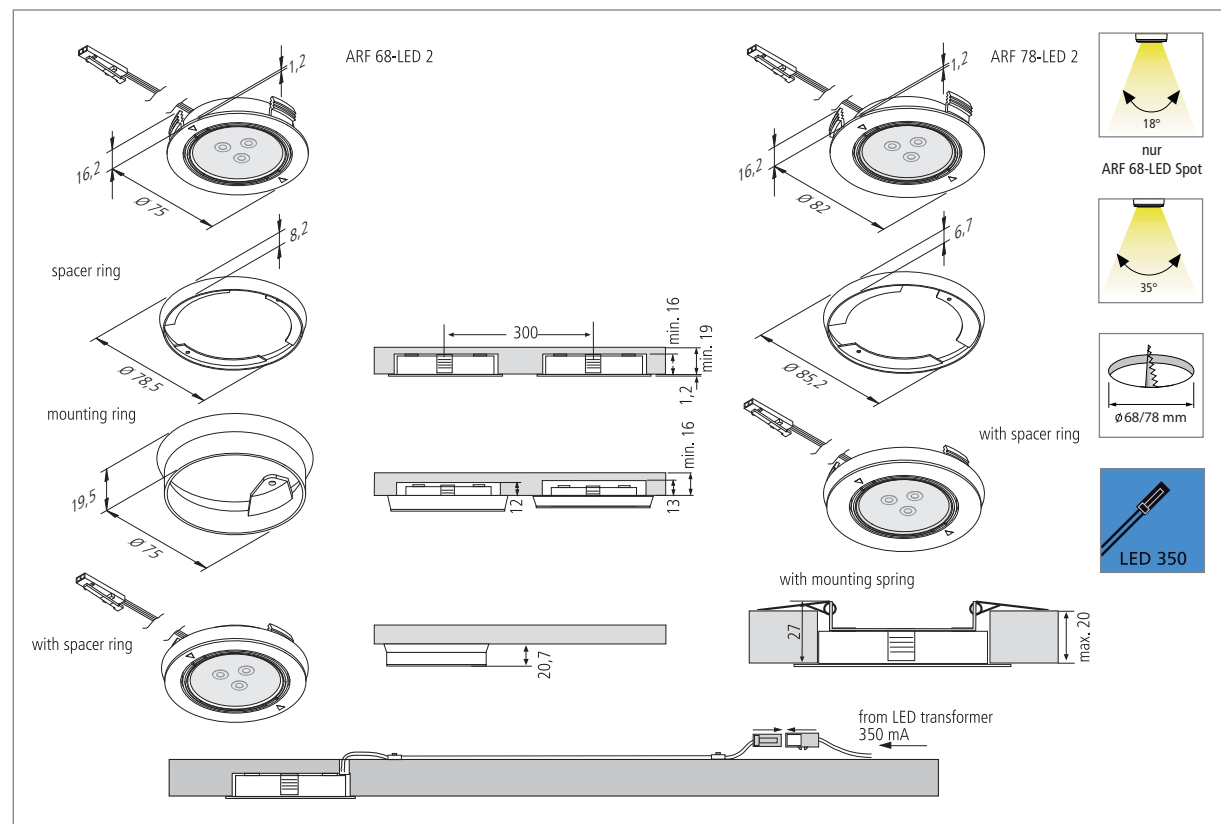

ARF 68-LED 2 / ARF 78-LED 2

LED
Halogen

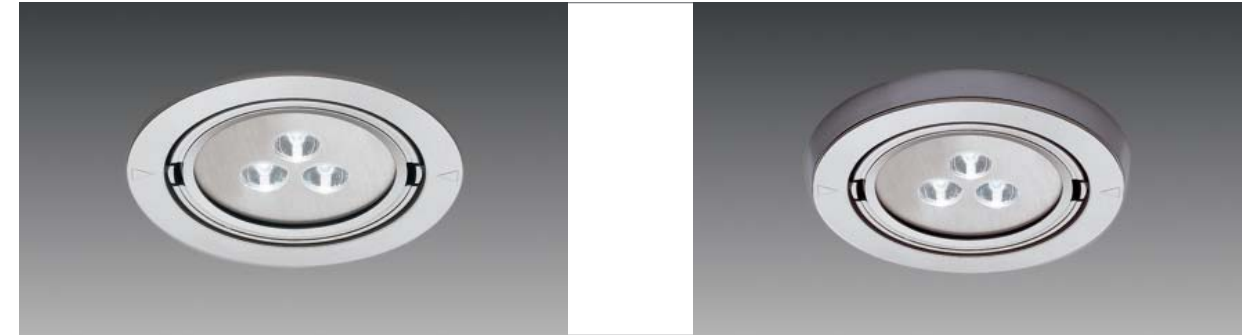

Article No.	Description	Illustration	Features	Approx. weight	
610 011 302 04	ARF 68-LED Spot 3x1W ww chrome		• for the 68 cut-out	90 g	
610 011 302 06	ARF 68-LED Spot 3x1W ww matt chrome		• light colour ww (warm white)	90 g	
610 011 302 08	ARF 68-LED Spot 3x1W ww stainless steel		• supply cable 1.8m with LED 350 plug	90 g	
610 011 301 04	ARF 68-LED Spot 3x1W cw chrome		• Spot with beam angle from 18°	90 g	
610 011 301 06	ARF 68-LED Spot 3x1W cw matt chrome		• for the 68 cut-out	90 g	
610 011 301 08	ARF 68-LED Spot 3x1W cw stainless steel		• light colour cw (cool white)	90 g	
610 011 202 04	ARF 68-LED 2 3x1W ww chrome			• supply cable 1.8m with LED 350 plug	90 g
610 011 202 06	ARF 68-LED 2 3x1W ww matt chrome			• Spot with beam angle from 18°	90 g
610 011 202 08	ARF 68-LED 2 3x1W ww stainless steel	• for the 68 cut-out		90 g	
610 011 201 04	ARF 68-LED 2 3x1W cw chrome	• light colour ww (warm white)		90 g	
610 011 201 06	ARF 68-LED 2 3x1W cw matt chrome	• supply cable 1.8m with LED 350 plug		90 g	
610 011 201 08	ARF 68-LED 2 3x1W cw stainless steel	• for the 68 cut-out		90 g	
610 503 732 08	set of 3 ARF 68-LED 2 3x1W ww stainless steel			• light colour cw (cool white)	445 g
610 503 752 08	set of 5 ARF 68-LED 2 3x1W ww stainless steel			• supply cable 1.8m with LED 350 plug	670 g
610 005 902 04	ARF 78-LED 2 3x1W ww chrome		• incl. transformer LED 350/9W	95 g	
610 005 902 06	ARF 78-LED 2 3x1W ww matt chrome		• for the 78 cut-out	95 g	
610 005 902 08	ARF 78-LED 2 3x1W ww stainless steel		• light colour ww (warm white)	95 g	
610 005 901 04	ARF 78-LED 2 3x1W cw chrome		• supply cable 1.8m with LED 350 plug	95 g	
610 005 901 06	ARF 78-LED 2 3x1W cw matt chrome		• for the 78 cut-out	95 g	
610 005 901 08	ARF 78-LED 2 3x1W cw stainless steel		• light colour cw (cool white)	95 g	
610 503 832 08	set of 3 ARF 78-LED 2 3x1W ww stainless steel			• supply cable 1.8m with LED 350 plug	460 g
610 503 852 08	set of 5 ARF 78-LED 2 3x1W ww stainless steel			• incl. transformer LED 350/2x9W	700 g
205 020 108 02	Spacer ring (K105) chrome		• for ARF 68-LED 2	4 g	
205 020 108 12	Spacer ring (K105) matt chrome		• reduces the recess depth to 12mm	4 g	
205 020 108 08	Spacer ring (K105) stainless steel			4 g	
205 020 108 64	Spacer ring (K129) chrome		• for ARF 78-LED 2	5 g	
205 020 108 66	Spacer ring (K129) matt chrome		• reduces the recess depth to 13mm	5 g	
205 020 108 68	Spacer ring (K129) stainless steel			5 g	
515 000 370 04	Mounting ring (K106) chrome		• for ARF 68-LED 2	14 g	
515 000 370 06	Mounting ring (K106) matt chrome		• incl. fastening screws	14 g	
515 000 370 08	Mounting ring (K106) stainless steel			14 g	
615 000 301 01	Mounting spring ARF 68/78/Q		• for mounting in lightweight design ceilings	24 g	
215 250 610 01	LED 350 connecting cable 1m			12 g	
215 250 620 01	LED 350 connecting cable 2m			20 g	
615 003 009 03	Transformer LED 350/9W 3-way distributor with Euro plug		• for 1-3 ARF-LED 2 (further information on page 124)	175 g	
615 003 009 23	Transformer LED 350/2x9W 2x3-way distributor with Euro plug		• for 2-6 ARF-LED 2 (further information on page 125)	220 g	

NEW

NEW