ARF 68 / ARF 78

Cool Recessed Halogen Spotlight for the 68 / 78 Cut-out

Application: special spotlight for heat-sensitive structural materials in kitchen, bathroom, bedroom and living room
Connection: halogen transformer 12V
Lamp: long-life G4 halogen lamp "OSRAM HALOSTAR STARLITE®", ø life 4,000 hours / max. 20W
Energy efficiency: satisfactory, 13 – 16lm/W (10 – 20W)
Colour rendering: very good, Ra = 100
Special features: accessories include mounting ring for installation without a cut-out (only ARF 68), and spacer ring to reduce the recess depth to 12mm or 13mm (ARF 78) respectively; with heat distribution plate to protect the structural materials; Outer casing made of high-tech plastic (high-temperature resistant, dimensionally stable and non-brittle) guarantees safe support even after years of use.

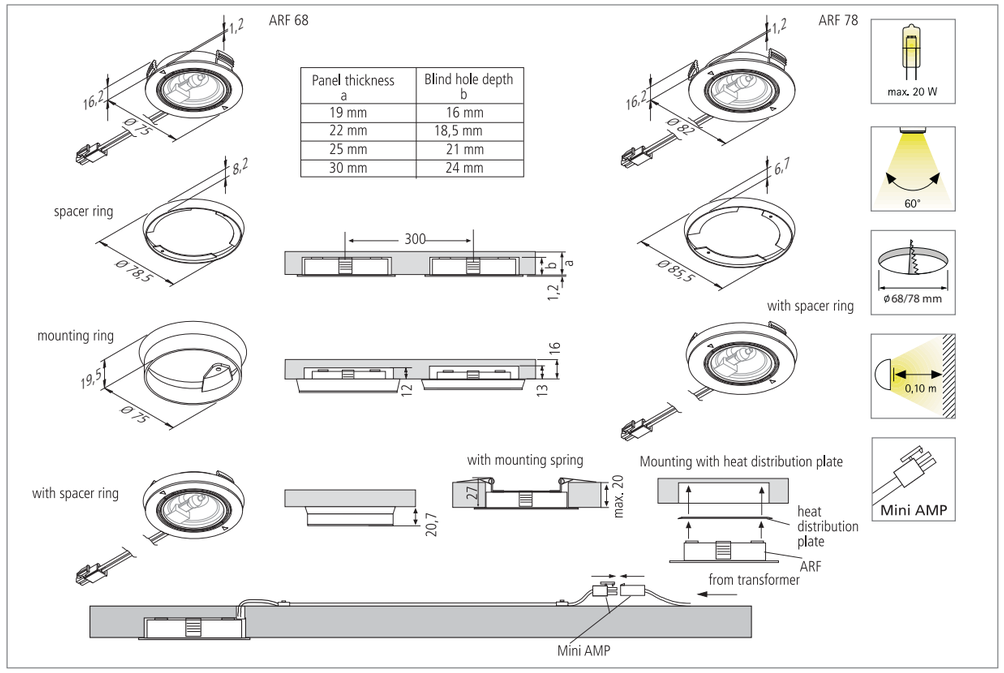

[1] Version on request

ARF 68 / ARF 78

LED
Halogen

Article No.	Description	Illustration	Features	Approx. weight
610 003 802 41	ARF 68 20W white		• for the **68** cut-out • supply cable 1.8m with Mini AMP plug included loose • incl. satinised tempered glass cover • incl. WVP (heat distribution plate) for use in blind holes	75 g
610 003 802 43	ARF 68 20W black			75 g
610 003 802 44	ARF 68 20W chrome			75 g
610 003 802 45	ARF 68 20W gold			75 g
610 003 802 47	ARF 68 20W matt chrome			75 g
610 003 802 46	ARF 68 20W stainless steel			75 g
610 507 803 78	**set of 3** ARF 68 20W stainless steel		• incl. transformer Puma 105W • supply cable 1.8m with Mini AMP plug included loose • incl. satinised tempered glass cover • incl. WVP (heat distribution plate) for use in blind holes	435 g
610 004 020 04	ARF 78 20W chrome		• for the **78** cut-out • supply cable 1.8m with Mini AMP plug included loose • incl. satinised tempered glass cover • incl. WVP (heat distribution plate)	80 g
610 004 020 06	ARF 78 20W matt chrome			80 g
610 004 020 08	ARF 78 20W stainless steel			80 g
610 507 623 08	**set of 3** ARF 78 20W stainless steel		• incl. transformer Puma 105W • supply cable 1.8m with Mini AMP plug included loose • incl. satinised tempered glass cover • incl. WVP (heat distribution plate) for use in blind holes	450 g
205 020 108 01	Spacer ring (K105) white		• for ARF 68 • reduces the recess depth to 12mm	4 g
205 020 108 05	Spacer ring (K105) black			4 g
205 020 108 02	Spacer ring (K105) chrome			4 g
205 020 108 03	Spacer ring (K105) gold			4 g
205 020 108 12	Spacer ring (K105) matt chrome			4 g
205 020 108 08	Spacer ring (K105) stainless steel			4 g
205 020 108 64	Spacer ring (K129) chrome		• for ARF 78 • reduces the recess depth to 13mm	5 g
205 020 108 66	Spacer ring (K129) matt chrome			5 g
205 020 108 68	Spacer ring (K129) stainless steel			5 g
515 000 370 01	Mounting ring (K106) white		• for ARF 68 • incl. fastening screws	14 g
515 000 370 03	Mounting ring (K106) black			14 g
515 000 370 04	Mounting ring (K106) chrome			14 g
515 000 370 05	Mounting ring (K106) gold			14 g
515 000 370 06	Mounting ring (K106) matt chrome			14 g
515 000 370 08	Mounting ring (K106) stainless steel			14 g
215 032 202 20	Mini AMP connecting cable 0.5m		• further information on page 130	25 g
215 032 202 10	Mini AMP connecting cable 1m			40 g
215 032 202 02	Mini AMP connecting cable 1.8m			65 g
615 000 301 01	Mounting spring ARF 68/78/Q		• for mounting in lightweight design ceilings	24 g
222 010 102 12	Tungsten carbide hole saw D=78mm		• incl.10mm adapter/for wood up to 30mm	470 g
Accessories:	**Transformers for halogen spotlights page 116–123**			

NEW