


FD 8 (T5)



Diagonal Luminaire for Strip Lights without Dark Zones

- Application:** diagonal linear luminaire for optimal illumination of displays, slides and light boxes without dark zones
- Connection:** 220 – 240V / 50 – 60Hz
- Lamp:** extra long-life T5 (ø 16mm) high efficiency fluorescent lamp, ø life 20,000 hours / or high output fluorescent lamp, ø life 24,000 hours
- Energy efficiency:** good – very good, 73 – 94lm/W (14 – 80W)
- Colour rendering:** good, Ra = 80 – 89
- Special features:** flicker-free instant start, energy-saving and suitable for frequent on/off switching via an electronic ballast; dimmable version also available (1 – 10V), and various wattages (high efficiency or high output). Subsequent removal from the light strip possible due to the integrated contact slide.

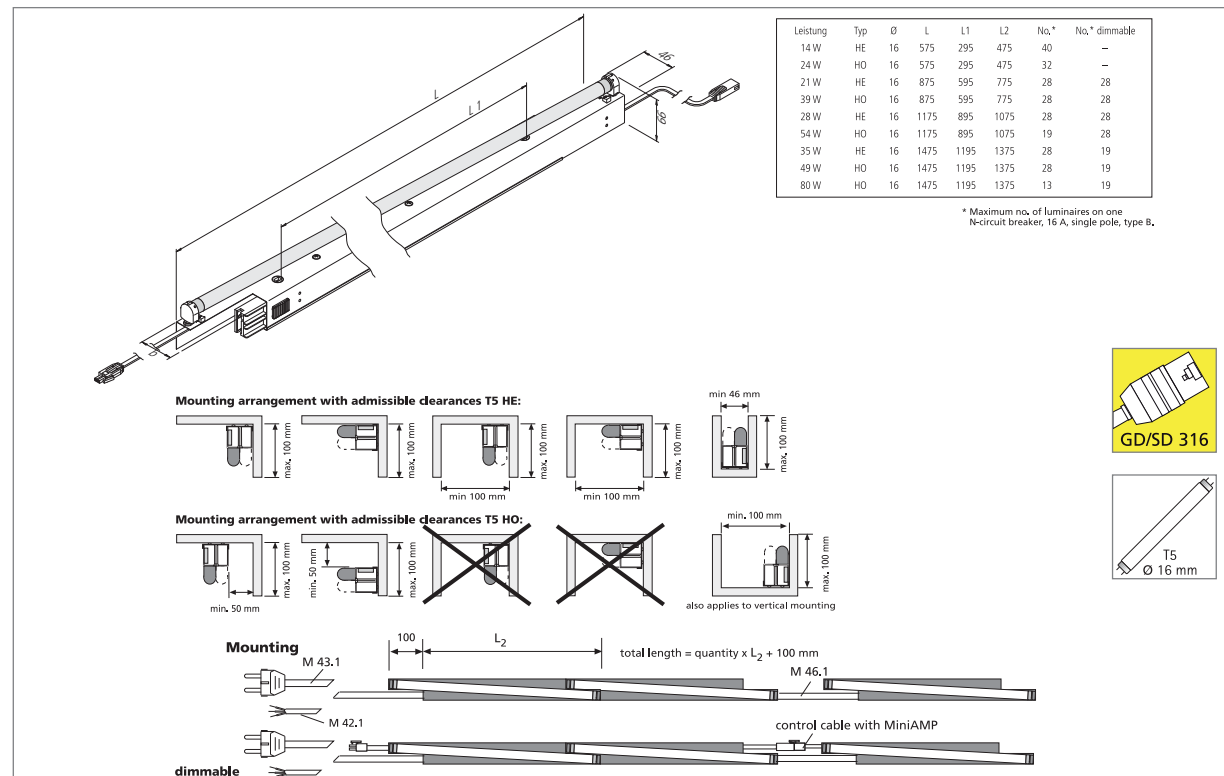

FD 8 (T5)



Article No.	Description	Illustration	Features	Approx. weight
501 100 401 00	FD 8 575mm 14W (T5) HE		<ul style="list-style-type: none"> • please order T5 HE lamp (from page 142) separately • incl. electronic ballast 	650 g
501 100 402 00	FD 8 875mm 21W (T5) HE			1200 g
501 100 403 00	FD 8 1175mm 28W (T5) HE			1650 g
501 100 404 00	FD 8 1475mm 35W (T5) HE			1950 g
501 100 501 00	FD 8 575mm 24W (T5) HO			650 g
501 100 502 00	FD 8 875mm 39W (T5) HO		<ul style="list-style-type: none"> • please order T5 HO lamp (page 142) separately • incl. electronic ballast 	1200 g
501 100 503 00	FD 8 1175mm 54W (T5) HO			1650 g
501 100 504 00	FD 8 1475mm 49W (T5) HO			1950 g
501 100 505 00	FD 8 1475mm 80W (T5) HO			1950 g
501 100 203 00	FD 8 875mm 21/39W (T5) dimmable			1300 g
501 100 204 00	FD 8 1175mm 28/54W (T5) dimmable		<ul style="list-style-type: none"> • please order T5 lamp (page 142) separately • incl. electronic ballast • dimmable (1 – 10V) • Dimmer (page 138) 	1750 g
501 100 205 00	FD 8 1475mm 35/49/80W (T5) dimmable			2050 g
501 100 603 00	FD 8 875mm 21/39W (T5) dimmable			1300 g
501 100 604 00	FD 8 1175mm 28/54W (T5) dimmable			1750 g
501 100 605 00	FD 8 1475mm 35/49/80W (T5) dimmable			2050 g
215 032 205 01	Mini AMP 1-10V mains cable 1m		<ul style="list-style-type: none"> • with ferrules • for dimmable version 1 - 10V and DALI 	35 g
215 032 202 60	Mini AMP 1-10V connecting cable 0,15m			10 g
215 032 202 70	Mini AMP 1-10V connecting cable 0,3m			15 g
215 032 202 80	Mini AMP 1-10V connecting cable 0,6m			25 g
215 032 202 90	Mini AMP 1-10V connecting cable 1,2m			45 g
215 032 202 02	Mini AMP 1-10V connecting cable 1,8m	65 g		
215 100 105 01	M42.1/ 500 mains cable 0,5m		<ul style="list-style-type: none"> • with ferrules • with shockproof right angle plug D/F/B 	70 g
215 100 102 01	M42.1/1000 mains cable 1m			120 g
215 100 103 01	M42.1/1500 mains cable 1,5m			170 g
215 100 101 01	M42.1/2000 mains cable 2m			220 g
215 100 104 01	M42.1/3000 mains cable 3m			320 g
215 100 204 01	M43.1/1000 mains cable 1m			170 g
215 100 203 01	M43.1/1500 mains cable 1,5m			220 g
215 100 201 01	M43.1/2000 mains cable 2m			270 g
215 100 202 01	M43.1/3000 mains cable 3m			370 g
215 100 401 01	M46.1/ 200 connecting cable 0,2m			50 g
215 100 404 01	M46.1/ 300 connecting cable 0,3m	60 g		
215 100 402 01	M46.1/ 500 connecting cable 0,5m	80 g		
215 100 403 01	M46.1/1000 connecting cable 1m	130 g		
215 100 405 01	M46.1/1500 connecting cable 1,5m	180 g		
215 100 406 01	M46.1/2000 connecting cable 2m	230 g		
215 100 407 01	M46.1/3000 connecting cable 3m	320 g		
502 004 000 04	G 316 M socket		<ul style="list-style-type: none"> • mountable 	25 g
502 005 000 04	S 316 M plug			25 g

further information on page 132