


LED Stick 2 / LED Twin-Stick 2



Hera[®]
Light Years Ahead.

About Hera

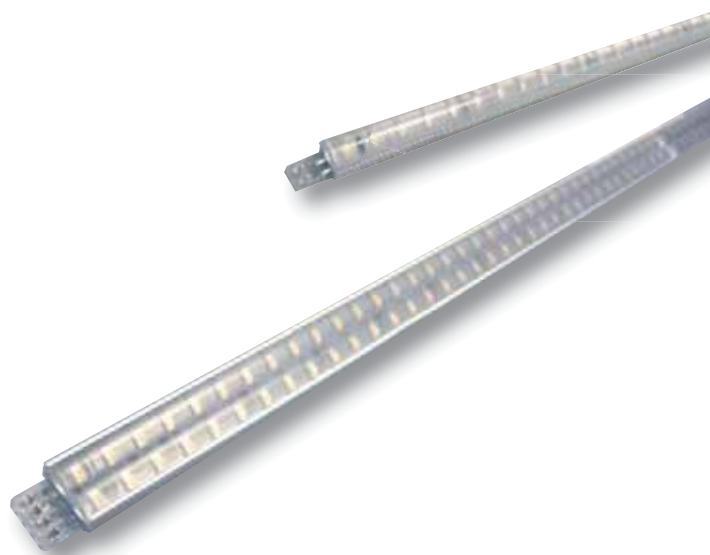

Hera headquarters in Enger



Hera headquarters in Norcross, USA

Hera - your global partner

Tradition, partnership and innovation are inextricably linked at Hera. Since the company was launched we have constantly implemented new ideas and forward-looking solutions. At the same time we have worked closely with our customers to develop new technologies. And to ensure that this does not change, we consistently invest in research and development.

You can benefit worldwide from our creativity and expertise in conceptual design, development, construction, assembly, tool-making, installation and service. Hera offers you products from a one-stop source – innovative, on schedule and geared to success.

*Our work -
your success!*

Our services for you:

- Market-driven standard range – individual tailor-made solutions
- Staff who understand you
- Always at the cutting edge of technology
- Punctual delivery
- Minimal tools required = cost savings on mounting
- Best quality at attractive prices



Our employees are always receptive to the wishes of our customers



Tried and tested quality

LED Stick 2 / LED Twin-Stick 2



Hera's brand new LED Stick 2 / LED Twin-Stick 2 is the latest generation in linear LED lighting. These ultra compact LED strips are the ideal energy-efficient solution where brilliant and uniform illumination is required but without exposing goods or material to heat. Tailored for the lighting task at hand this lighting system can be used as a single LED strip arrangement (LED-Stick 2) or a double LED strip arrangement (LED Twin-Stick 2). Available in different light colours these compact LED Sticks are perfect for commercial applications such as store fixtures and displays but also a fantastic

lighting solution for industrial cooler and freezer cases. The surface mounted LED Sticks are attached quickly and easily to glass cases, cupboard units and displays using the installation clips supplied. For wooden construction a translucent plastic profile conceals the milled groove and is available as an accessory. Low energy consumption, less heat and virtually no maintenance are just some of the major customer benefits.




LED Stick 2



Small, plug-in LED stick without dark zones

- Application:** surface-mounted luminaire for furniture and showcases containing heat-sensitive products
- Connection:** LED-transformer DC 24V
- Lamp:** extremely long-life 70 mW LED, ϕ life 30,000 hours
- Energy efficiency:** good, ww: 45lm/W; cw: 50lm/W
- Colour rendering:** good, ww: Ra = 90; cw: Ra = 80
- Special features:** no UV rays; maximum 20W or 2,4m in a light strip; without dark zones; LED Stick with side-connection for continues strip lighting

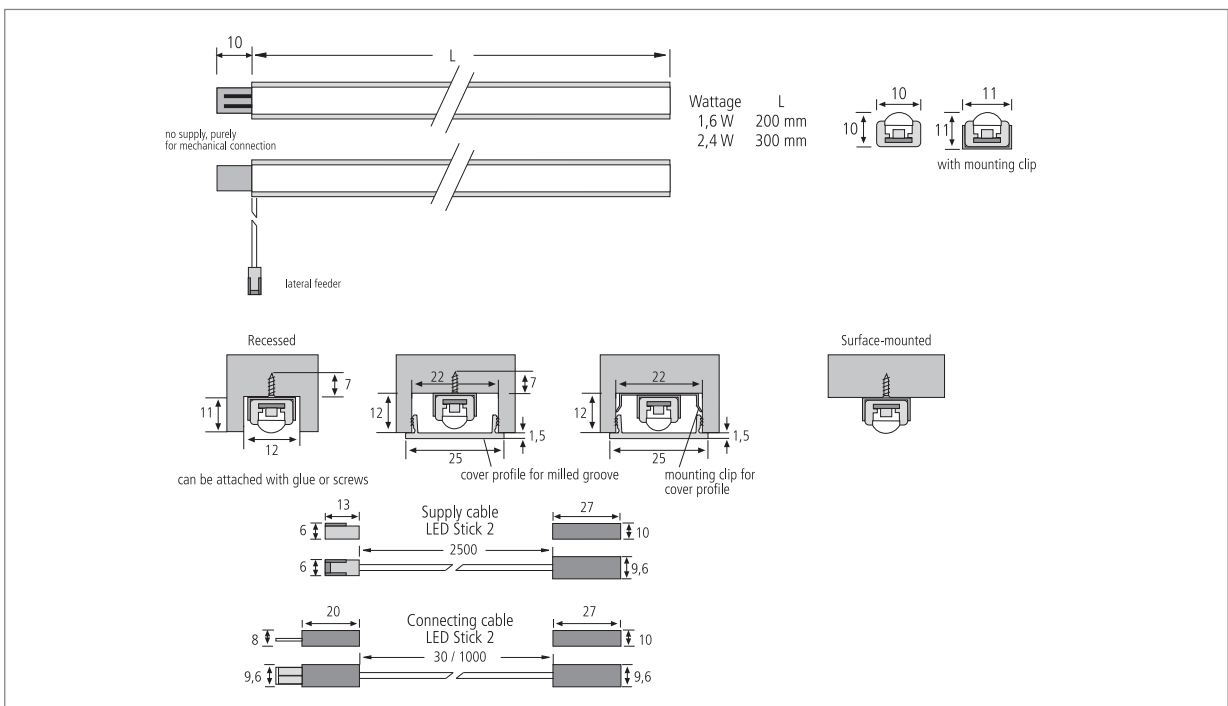


LED Twin-Stick 2



Small, twin plug-in LED stick without dark zones

- Application:** surface-mounted luminaire for furniture and showcases containing heat-sensitive products
- Connection:** LED-transformer DC 24V
- Lamp:** extremely long-life 70 mW LED, \varnothing life 30,000 hours
- Energy efficiency:** good, ww: 45lm/W; cw: 50lm/W
- Colour rendering:** good, ww: Ra = 90; cw: Ra = 80
- Special features:** no UV rays; maximum 36W or 2,4m in a light strip; without dark zones; LED Stick with side-connection for continues strip lighting

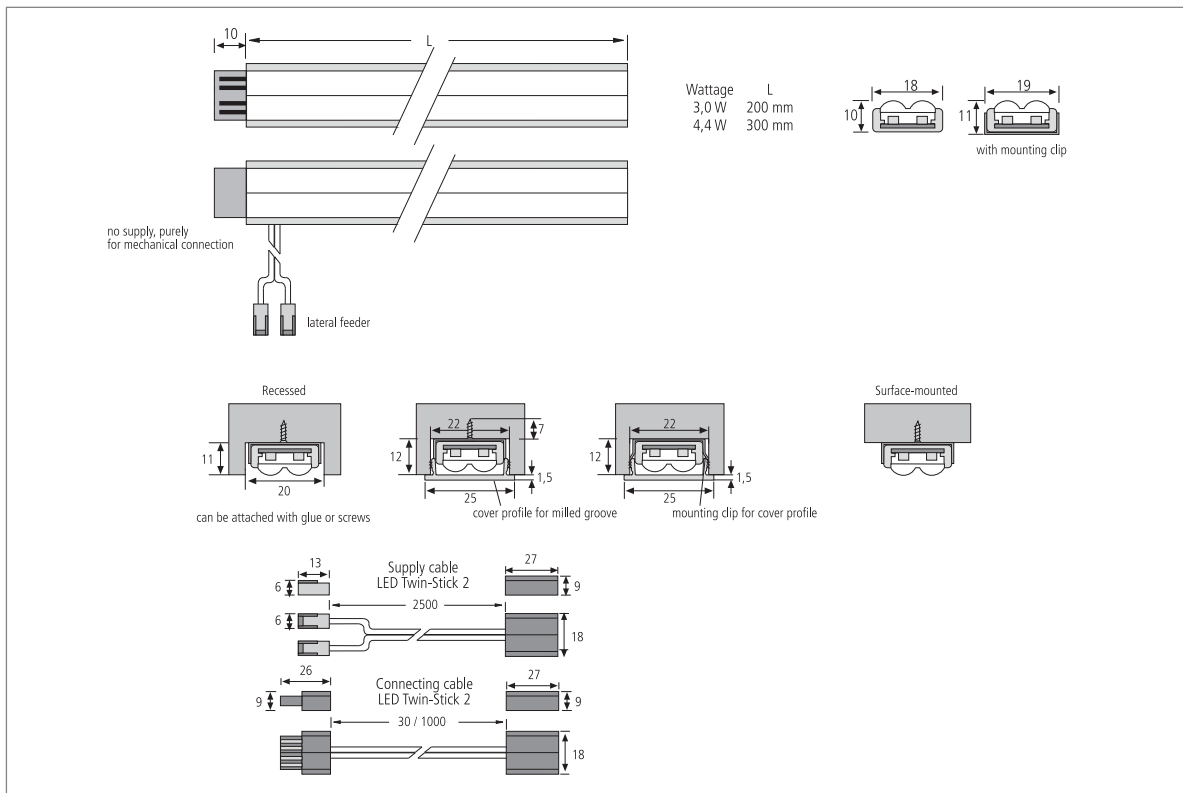


Accessories



LED 24/15W

Electronic safety isolating transformer for 24V DC LED to 15W


- Connection: 220 – 240V / 0 – 50/60Hz
- Output: 1 – 15W
- constant 24V DC
- protected against short-circuit, overload and no-load
- max. length of secondary cables: 5m each
- also with remote controller to dim or switch (reach max. 15m) with holder

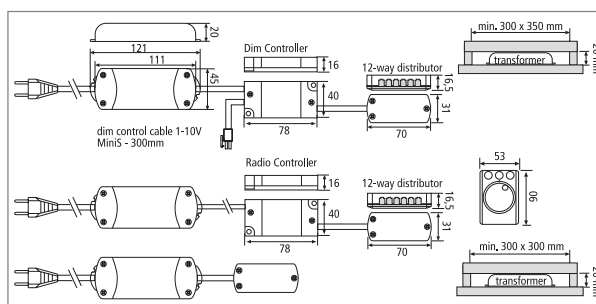

LED 24/30W

Electronic safety isolating transformer for 24V DC LED to 30W


- Connection: 220 – 240V / 0 – 50/60Hz
- Output: 1 – 30W
- constant 24V DC
- protected against short-circuit, overload and no-load
- max. length of secondary cables: 5m each
- also with remote controller to dim or switch (reach max. 15m) with holder
- optional with amplifier for remote controller

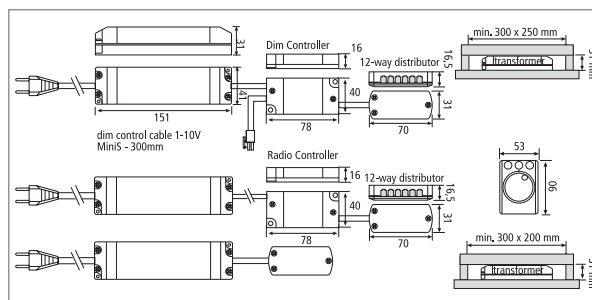

LED 24/60W

Electronic safety isolating transformer for 24V DC LED to 60W

- Connection: 100 – 240V / 50 – 60Hz
- Output: 10 – 60W
- constant 24V DC
- protected against short-circuit, overload and no-load
- max. length of secondary cables: 5m each

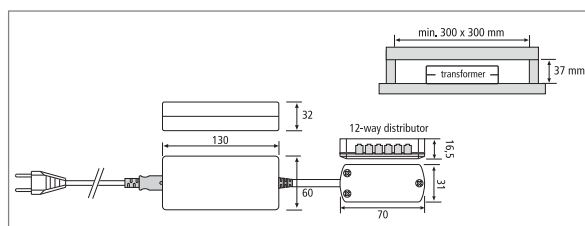

LED Stick 2

Article No.	Description	Illustration	Features	Approx. weight
202 021 222 01	LED Stick 2 200mm 24 LED 1,6W cw		• colour appearance cw (cool white)	25 g
202 021 223 01	LED Stick 2 300mm 36 LED 2,4W cw			35 g
202 021 223 21	LED Stick 2 300mm 36 LED 2,4W cw SE 2,5m		• incl. lateral feeder 2,5m	60 g
202 021 222 02	LED Stick 2 200mm 24 LED 1,6W ww		• colour appearance ww (warm white)	25 g
202 021 223 02	LED Stick 2 300mm 36 LED 2,4W ww			35 g
202 021 223 22	LED Stick 2 300mm 36 LED 2,4W ww SE 2,5m		• incl. lateral feeder 2,5m	60 g
215 270 625 11	Supply cable LED Stick 2 2500mm		• connection between transformer and first Stick	25 g
215 270 600 21	Connecting cable LED Stick 2 30mm		• connection between two Sticks	3 g
215 270 610 11	Connecting cable LED Stick 2 1000mm			11 g
202 040 107 03	Mounting clip LED Stick 2		• included with Stick • incl. 2 crews and 2 adhesive strips	3 g
202 040 107 13	Mounting clip LED Stick 2 for cover profile		• set of 2 for groove with cover profile	3 g

LED Twin-Stick 2

202 021 232 01	LED Twin-Stick 2 200mm 48 LED 3,0W cw		• colour appearance cw (cool white)	45 g
202 021 233 01	LED Twin-Stick 2 300mm 72 LED 4,4W cw			68 g
202 021 233 11	LED Twin-Stick 2 300mm 72 LED 4,4W cw SE 2,5m		• incl. lateral feeder 2,5m	45 g
202 021 232 02	LED Twin-Stick 2 200mm 48 LED 3,0W ww		• colour appearance ww (warm white)	68 g
202 021 233 02	LED Twin-Stick 2 300mm 72 LED 4,4W ww			40 g
202 021 233 12	LED Twin-Stick 2 300mm 72 LED 4,4W ww SE 2,5m		• incl. lateral feeder 2,5m	2 g
215 272 625 02	Supply cable LED Twin-Stick 2 2500mm		• connection between transformer and first Stick	2 g
215 270 600 22	Connecting cable LED Twin-Stick 2 30 mm		• connection between two Twin-Sticks	5 g
215 270 610 12	Connecting cable LED Twin-Stick 2 1000 mm			21 g
202 040 107 04	Mounting clip LED Twin-Stick 2		• included with Stick • incl. 2 crews and 2 adhesive strips	4 g
202 040 107 14	Mounting clip LED Twin-Stick 2 for cover profile		• set of 2 for groove with cover profile	2 g

Accessories

203 012 801 10	Cover profile LED Stick 1000mm		• to cover the milled groove • material PC slightly matt	47 g
203 012 801 54	Cover profile LED Stick 5400mm roll			255 g
206 040 011 01	Transformer LED 24/15W DC 24V		• mains cable 2m or 1,8m (60W) with Euro plug	167 g
206 040 012 01	Transformer LED 24/30W DC 24V		• with 12-way distributor	250 g
615 003 006 02	Transformer LED 24/60W DC 24V			355 g
206 040 011 03	Transformer LED 24/15W DC 24V dimmable (radio controller)		• mains cable 2m with Euro plug • incl. remote controller to dim or switch	240 g
206 040 012 03	Transformer LED 24/30W DC 24V dimmable (radio controller)			325 g
615 003 008 05	Transformer LED 24/30W DC 24V with 12-way distributor dimmable (radio controller) + amplifier		• mains cable 2m with Euro plug • incl. 2,5m connecting cable to previous 12-way distributor	405 g
615 003 007 02	Transformer LED 24/15W DC 24V dimmable (1-10V)		• mains cable 2m with Euro plug • dimmmable (1-10V)	200 g
615 003 008 02	Transformer LED 24/30W DC 24V dimmable (1-10V)		• dimmer cable 0,3m with Mini AMP-plug	285 g
506 180 401 01	Mounting dimmer switch (1-10V)		• dimmer cable 2m with Mini AMP-socket	95 g



Hera[®]

Hera GmbH & Co. KG

Dieselstraße 9 · D-32130 Enger · Germany

PO Box 440 · D-32124 Enger · Germany

Tel.: +49 (0) 5224 911-0

Fax: +49 (0) 5224 911-215

mail@hera-online.de

www.hera-online.de

Subject to alterations

Status 09/2009