


# MK 2




## Flat Linear Luminaire with Plexiglass Cover

- Application:** flat linear luminaire for illuminating kitchen worktops, etc.  
**Connection:** 220 – 240V / 50 – 60Hz  
**Lamp:** long-life T5 (ø 16mm) fluorescent lamp, ø life 7,000 hours  
**Energy efficiency:** good, 56 – 64lm/W (8 – 13W)  
**Colour rendering:** good, Ra = 80 – 89  
**Special features:** flicker-free instant start, energy-saving and suitable for frequent on/off switching via an electronic ballast; integrated plug and socket in casing for uninterrupted strip lights; with integrated switch.

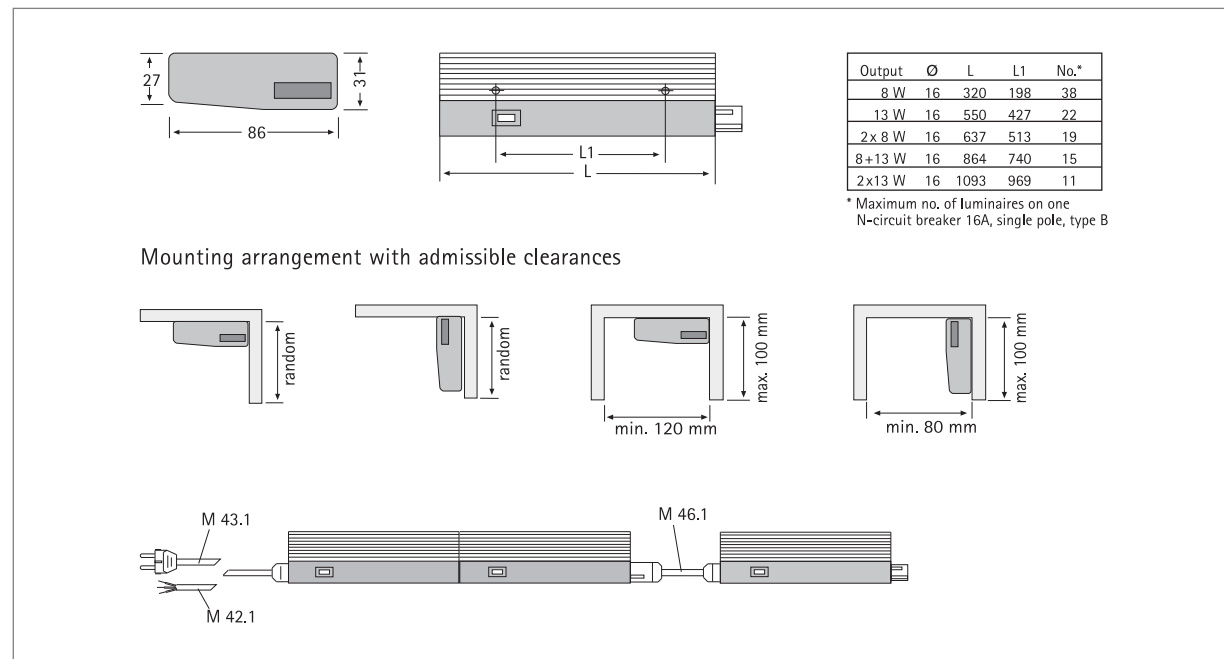

# MK 2



MK 2 – the extremely flat linear luminaire for installation under hanging kitchen cupboards without lighting screens, for example. The luminaires are available in five lengths from 320 to 1095 mm and can be combined to produce the desired length, without gaps. Connecting cables are available for mounting the luminaires with clearance, if desired.

Article No.	Description	Illustration	Features	Approx. weight	
501 000 501 02	MK 2 320mm 8W		<ul style="list-style-type: none"> <li>incl. electronic ballast</li> <li>incl. T5 lamp ww (warm white)</li> <li>incl. switch</li> <li>incl. plexiglass cover</li> </ul>	600 g	
501 000 502 02	MK 2 550mm 13W			900 g	
501 000 503 02	MK 2 637mm 2x8W			1150 g	
501 000 504 02	MK 2 866mm 8+13W			1300 g	
501 000 505 02	MK 2 1095mm 2x13W			1900 g	
501 000 531 02	MK 2 320mm 8W silver		<ul style="list-style-type: none"> <li>incl. electronic ballast</li> <li>incl. T5 lamp ww (warm white)</li> <li>incl. switch</li> <li>incl. plexiglass cover</li> <li>silver-coloured casing</li> </ul>	600 g	
501 000 532 02	MK 2 550mm 13W silver			900 g	
501 000 533 02	MK 2 637mm 2x8W silver			1150 g	
501 000 534 02	MK 2 866mm 8+13W silver			1300 g	
501 000 535 02	MK 2 1095mm 2x13W silver			1900 g	
215 100 105 01	M42.1/ 500 mains cable 0.5m		<ul style="list-style-type: none"> <li>with ferrules</li> </ul>	70 g	
215 100 102 01	M42.1/1000 mains cable 1m			120 g	
215 100 103 01	M42.1/1500 mains cable 1.5m			170 g	
215 100 101 01	M42.1/2000 mains cable 2m			220 g	
215 100 104 01	M42.1/3000 mains cable 3m			320 g	
215 100 204 01	M43.1/1000 mains cable 1m			<ul style="list-style-type: none"> <li>with shockproof right angle plug D/F/B</li> </ul>	170 g
215 100 203 01	M43.1/1500 mains cable 1.5m				220 g
215 100 201 01	M43.1/2000 mains cable 2m				270 g
215 100 202 01	M43.1/3000 mains cable 3m				370 g
215 100 401 01	M46.1/ 200 connecting cable 0.2m			<ul style="list-style-type: none"> <li>mountable</li> </ul>	50 g
215 100 404 01	M46.1/ 300 connecting cable 0.3m	60 g			
215 100 402 01	M46.1/ 500 connecting cable 0.5m	80 g			
215 100 403 01	M46.1/1000 connecting cable 1m	130 g			
215 100 405 01	M46.1/1500 connecting cable 1.5m	180 g			
215 100 406 01	M46.1/2000 connecting cable 2m	230 g			
215 100 407 01	M46.1/3000 connecting cable 3m	320 g			
502 004 000 04	G 316 M socket	25 g			
502 005 000 04	S 316 M plug	25 g			

further information on page 132