






Compact luminaire with aluminium casing and T5 Lamp

- Application:** universally suitable for shop-fittings, counters, shelving units, display cabinets, use behind lighting screens etc.
- Connection:** 220 – 240V / 50 – 60Hz
- Lamp:** extremely long-life T5 (ø 16mm) high efficiency fluorescent lamp, ø life 20,000 hours
- Energy efficiency:** very good, 86 – 94lm/W (14 – 35W)
- Colour rendering:** good, Ra = 80 – 89
- Special features:** flicker-free instant start and power-saving with electronic ballast; plexiglass cover (splinter shield) makes product ideal for use in the food industry; rigid connectors for minimum spacing between luminaires; vertical plug-in system allows later removal from the strip light.

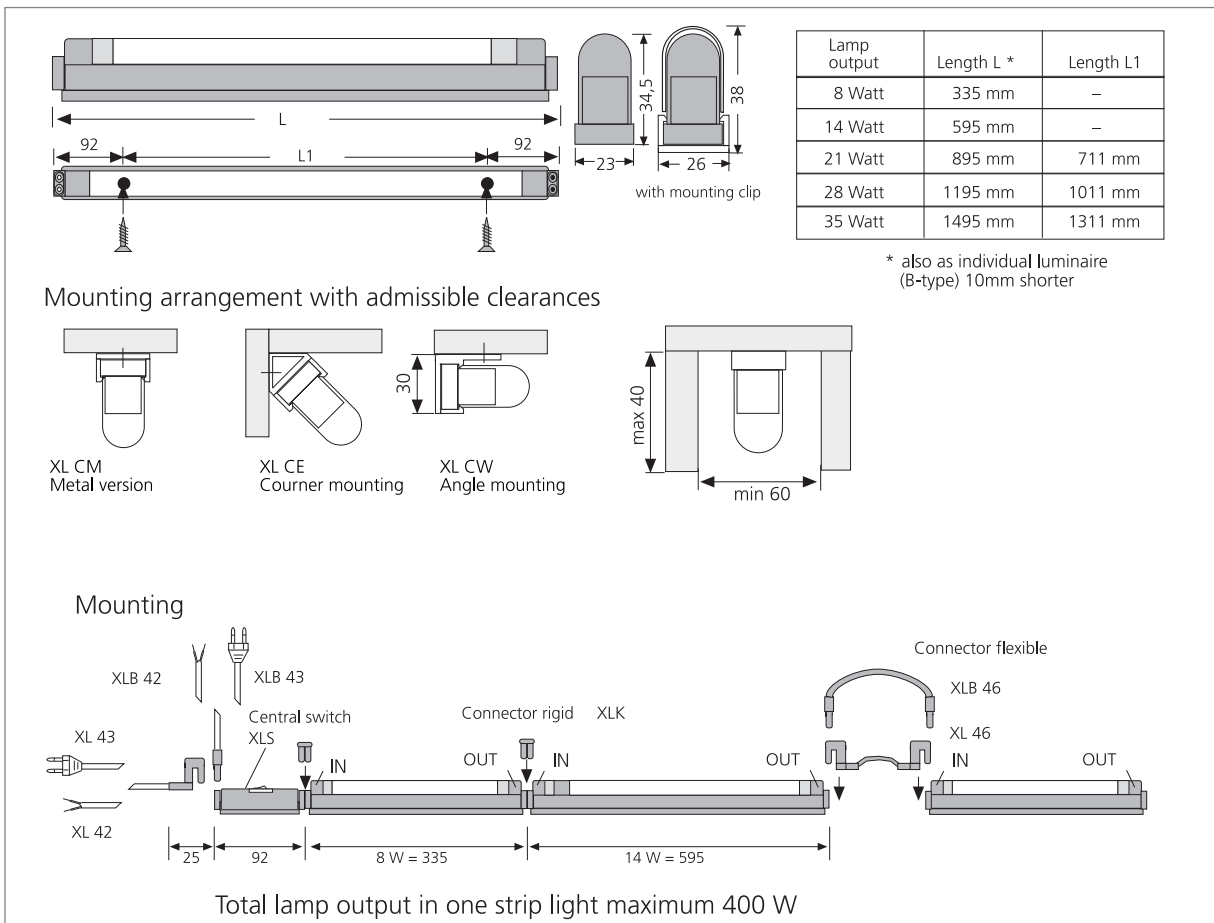

SlimLite® XL

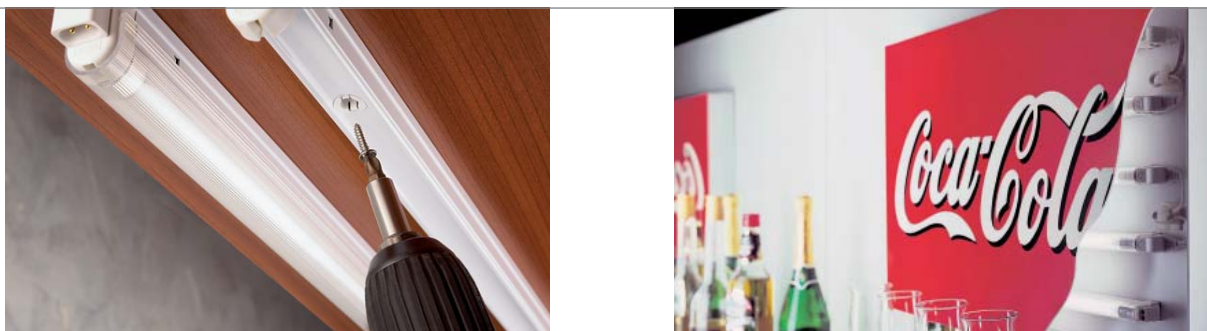

SlimLite® XL – the ideal lighting system for long strip lights in very tight spaces. The luminaires are available in lengths from 335 to 1495 mm and are suitable for extremely long-life, high efficiency T5 lamps with or without plexiglass cover.

Article No.	Description	Illustration	Features	Approx. weight
202 210 108 02	SlimLite XL 335mm 8W		<ul style="list-style-type: none"> • please order T5 lamps (from page 146) separately • plexiglass cover see below • 21 – 35W "screw-through" • 14 – 35W also as individual luminaire (B-type) 10mm shorter • aluminium casing 	170 g
202 210 104 02	SlimLite XL 595mm 14W			270 g
202 210 502 00	SlimLite XL 895mm 21W			380 g
202 210 503 00	SlimLite XL 1195mm 28W			470 g
202 210 504 00	SlimLite XL 1495mm 35W			550 g
215 120 102 05	XL 42/1800 mains cable with ferrules 1.8m		<ul style="list-style-type: none"> • horizontal luminaire connection (country-specific plugs page 137) 	80 g
215 120 104 03	XL 42/3000 mains cable with ferrules 3m			160 g
215 120 200 02	XL 43/1800 mains cable with Euro plug 1.8m			100 g
215 120 202 11	XL 43/3000 mains cable with shockproof plug D/F/B loose 3m			190 g
215 120 400 03	XL 46/ 150 connecting cable 0.15m			30 g
215 120 401 03	XL 46/ 300 connecting cable 0.3m			40 g
215 120 402 03	XL 46/ 600 connecting cable 0.6m			50 g
215 120 403 02	XL 46/1200 connecting cable 1.2m			90 g
215 120 404 02	XL 46/1800 connecting cable 1.8m			130 g
215 120 104 02	XLB 42/3000 mains cable with ferrules 3m			
215 120 200 07	XLB 43/1800 mains cable with Euro plug 1.8m	100 g		
215 120 400 05	XLB 46/ 150 connecting cable 0.15m	30 g		
215 120 401 05	XLB 46/ 300 connecting cable 0.3m	40 g		
215 120 402 05	XLB 46/ 600 connecting cable 0.6m	50 g		
215 120 403 05	XLB 46/1200 connecting cable 1.2m	90 g		
215 120 404 04	XLB 46/1800 connecting cable 1.8m	130 g		
215 120 000 03	XLK connecting coupling		<ul style="list-style-type: none"> • included with the luminaire 	10 g
217 032 000 02	XLS central switch			40 g
203 011 501 00	XL-PL plexiglass cover 8W			30 g
203 011 501 01	XL-PL plexiglass cover 14W			55 g
203 011 501 02	XL-PL plexiglass cover 21W			80 g
203 011 501 03	XL-PL plexiglass cover 28W			110 g
203 011 501 04	XL-PL plexiglass cover 35W			130 g
202 040 103 23	XL CM mounting clip metal version			20 g
202 040 103 21	XL CE mounting clip for corner mounting 45°			20 g
202 040 103 22	XL CW mounting clip for angled mountin 90°			20 g