

Dynamic LED Tape F

New    

Self-adhesive flexible LED strips with adjustable colour appearance and homogeneous planar light 








- Connection:** LED transformer DC 24 V
- Life:** L90/B10 ≥ 50.000 hours
- Energy efficiency:** LED 129 lm/W; luminaire: 590 lm/m (70 lm/W); this luminaire contains built-in, irreplaceable LED lamps of the energy efficiency class A to A++
- Colour rendering:** Ra/CRI > 90

Special features: max. 5 m per supply cable; quick and easy installation due to double-sided adhesive tape; tapes can be shortened at 62,5 mm intervals; afterwards the tapes cannot be reconnected; minimum bending radius 50 mm; colour appearance adjustable between 2700K (xw) and 5000K (cw); with IP54 suitable for applications requiring higher ingress protection (general humidity, bathroom, kitchen, shops); homogenous planar light (no visible luminous spots)

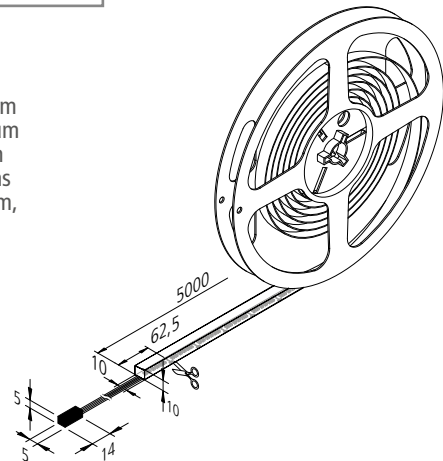

	xw	cw
0,5m	496 lx	548 lx
1,0m	124 lx	137 lx
1,5m	55 lx	61 lx
2,0m	31 lx	34 lx
2,5m	20 lx	22 lx



Article No.	Description	Abbildung	Features	Weight
202 029 501 01	Dynamic LED Tape F 5m 2x560 LED 40W		<ul style="list-style-type: none"> • colour appearance adjustable between appr. 2700K and 5000K • incl. supply cable 2,5m • with PU compound (IP 54) 	750 g
615 000 505 32	24V Dynamic Controller Radio 75W incl. 4-channel remote control		<ul style="list-style-type: none"> • as essential accessory • colour change, dim and switch • 4-way distributor • further dynamic controller (among other WiFi + DALI) page 158 	130 g
615 000 505 31	24V Dynamic Controller Radio 75W incl. surface mounted remote control			105 g
615 000 505 34	24V Dynamic Controller Radio 75W incl. recessed remote control			80 g
215 350 610 01	Connecting cable Dynamic 1m		<ul style="list-style-type: none"> • connection between distributor and luminaire 	16 g
215 350 625 01	Connecting cable Dynamic 2,5m			40 g
215 080 607 14	Dynamic 4-way distributor		<ul style="list-style-type: none"> • cable 100mm with Dynamic plug • for 3 additional supply cables 	16 g
Accessories	LED transformers 24V from page 154 / DALI and WiFi controller page 158			