

Dynamic LED Tape S

New    

Self-adhesive flexible LED strips with adjustable colour appearance and silicone compound




Connection: LED transformer DC 24 V
Life: L90/B10 ≥ 50.000 hours
Energy efficiency: LED: 130 lm/W; luminaire: 1300 lm/m (87 lm/W); this luminaire contains built-in, irreplaceable LED lamps of the energy efficiency class A to A++







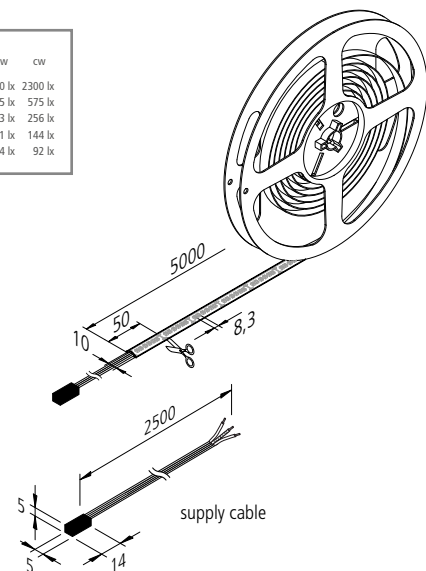

Colour rendering: Ra/CRI > 92

Special features: max. 5 m per supply cable; quick and easy installation due to double-sided adhesive tape; tapes can be shortened at 50 mm intervals (marking between the LEDs); colour appearance adjustable between 2700K (xw) and 5000K (cw); with IP54 suitable for applications requiring higher ingress protection (general humidity, bathroom, kitchen, shops). The silicone compound assures an additional mechanical protection e.g. for regular cleaning works.



Dynamic LED Tape S		xw	cw
0,5m	120° Ø 650	2100 lx	2300 lx
1,0m	Ø 1300	525 lx	575 lx
1,5m	Ø 1950	233 lx	256 lx
2,0m	Ø 2600	131 lx	144 lx
2,5m	Ø 3250	84 lx	92 lx



Article No.	Description	Illustration	Features	Weight
202 029 013 01	Dynamic LED Tape S 5m 2x600 LED 75W		<ul style="list-style-type: none"> colour appearance adjustable between approx. 2700K and 5000K incl. supply cable 2,5m 	260 g
215 340 625 11	Supply cable Dynamic Tape 2,5m		<ul style="list-style-type: none"> for soldering 	35 g
615 000 505 32	24V Dynamic Controller Radio 75W incl. 4-channel remote control		<ul style="list-style-type: none"> as essential accessory colour change, dim and switch 4-way distributor further dynamic controller (among other WiFi + DALI) page 158 	130 g
615 000 505 31	24V Dynamic Controller Radio 75W incl. surface mounted remote control			105 g
615 000 505 34	24V Dynamic Controller Radio 75W incl. recessed remote control			80 g
215 350 610 01	Connecting cable Dynamic 1m		<ul style="list-style-type: none"> connection between distributor and luminaire 	16 g
215 350 625 01	Connecting cable Dynamic 2,5m			40 g
215 080 607 14	Dynamic 4-way distributor		<ul style="list-style-type: none"> cable 100mm with Dynamic plug for 3 additional supply cables 	16 g
Accessories	Profiles page 58 / LED transformers 24V from page 154 / DALI and WiFi controller page 158			