

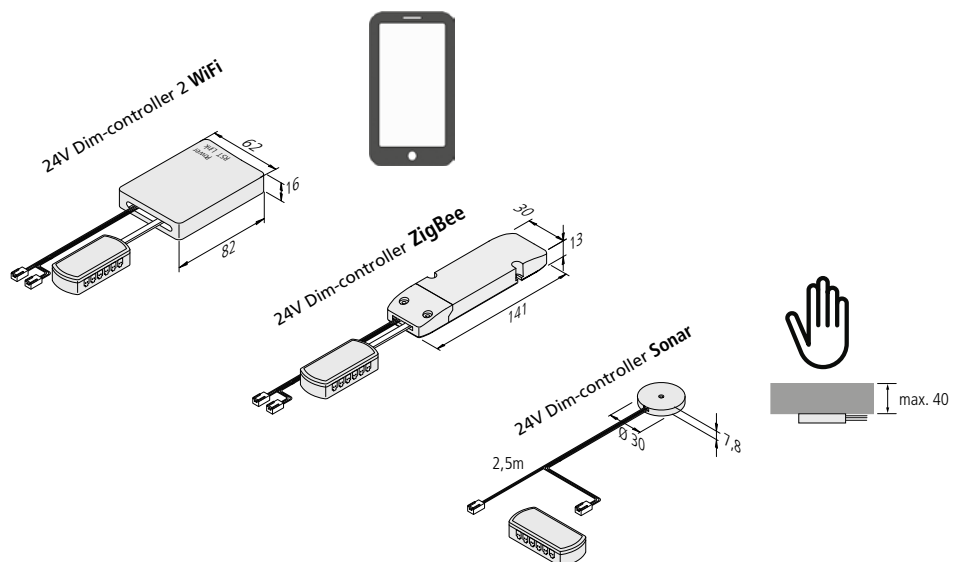


LED 24 V Dim-Controller

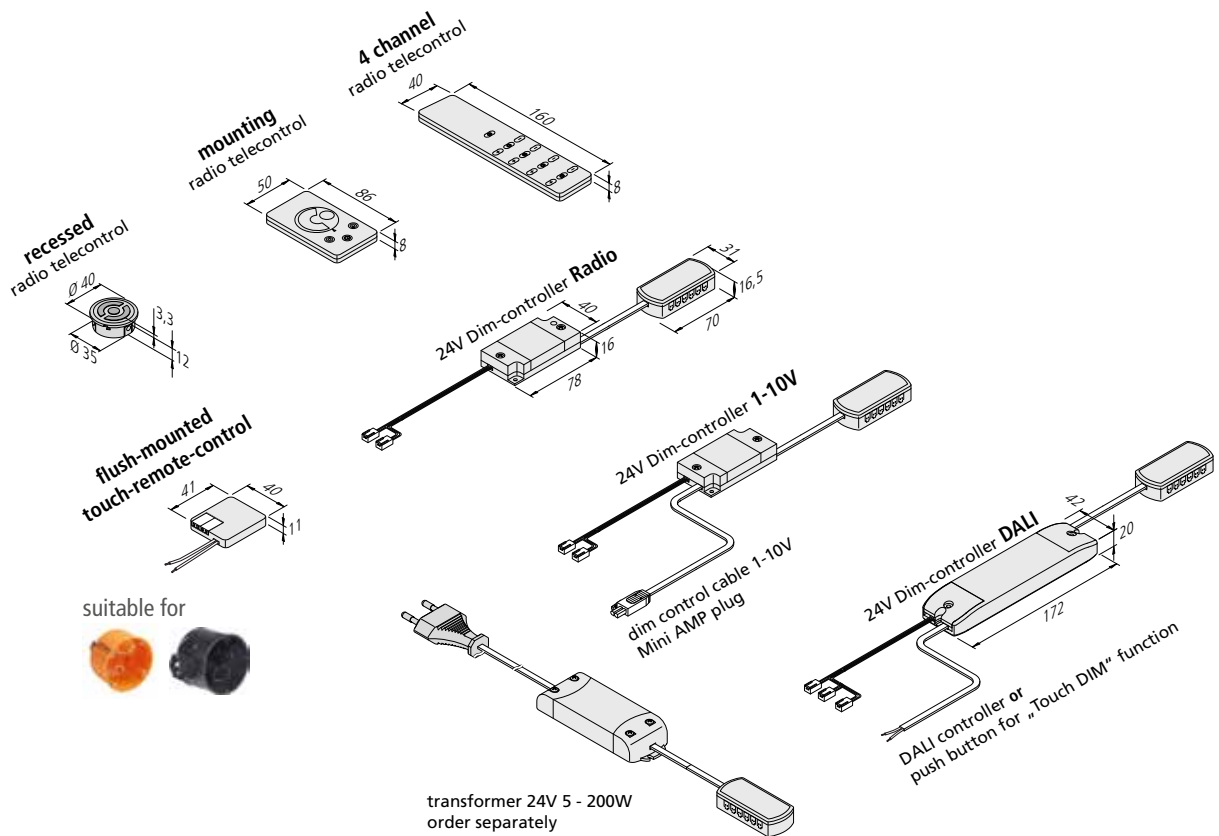


Dim-controller as optional accessory for 24 V transformer

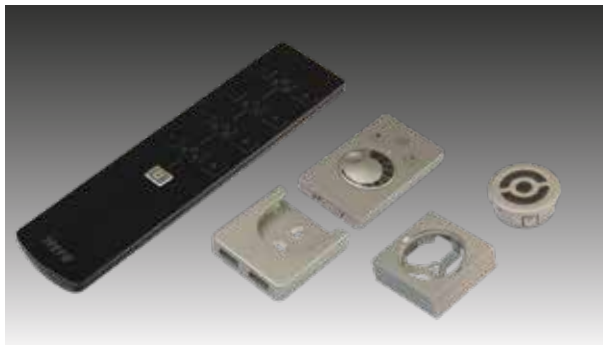

LED 24 V Dim-Controller

Dim-controller as optional accessory for 24 V transformer

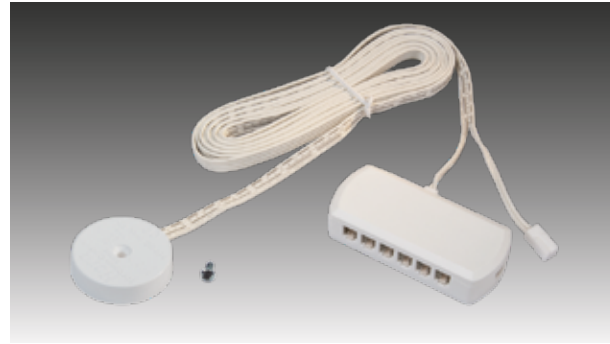

- constant 24 V DC / for luminaires with LED 24 plug
- easy plug-in connection for new or existing installations
- with memory-function (after cut off from mains the last dimming status is recovered)
- **radio telecontrol** to dim and switch (operating distance 15m / less for walls and ceilings)
 - **NEW:** flush-mounted touch-remote-control to control the colour setting, dim and switch with customary push-button
 - 4 channel radio telecontrol with master button and wall mounting combinable with dynamic-controllers
 - mounting radio telecontrol with wall mounting
 - recessed radio telecontrol for wood with 35 mm cut-out min. 12 mm incl. mounting housing stainless steel or for use in standard sockets
 - plenty of radio controllers can be activated simultaneously using a remote control or per channel
 - **NEW:** all controller with „Soft Off“ and „Multicontrol“ (it is possible to program up to 7 remote controls to **one** controller)
- **dim-controller DALI** for connection to complex controls or bus systems
- **controllable with every iOS or Android smartphone** or tablet (with free of charge Hera-App), operating distance up to 50 m
 - easy installation with Plug & Play components and connecting system
 - can be used as stand-alone-system without an existing WiFi system; with an existing WiFi system max. 14 controllers can be used
 - incl. remote function (external control) and timer function (individual runtime and break time)
- **Sonar-controller** for invisible switching and dimming behind wood, glass, stone, or ceramic with a max. size of 40 mm

New

New

Article No.	Description	Features	Weight
208 050 030 06	24V Dim-controller radio controller 80W with 12-way distributor	• incl. flush-mounted touch-remote-control to dim and switch	85 g
615 000 505 26	24V Dim-controller radio controller 80W with 12-way distributor	• incl. 4 channel radio telecontrol to dim and switch	130 g
615 000 505 23	24V Dim-controller radio controller 80W with 12-way distributor ¹⁾	• incl. mounting radio telecontrol to dim and switch	105 g
615 000 505 24	24V Dim-controller radio controller 80W with 12-way distributor ¹⁾	• incl. recessed radio telecontrol to dim and switch	80 g
208 050 030 02	24V Dim-controller radio controller 80W with 12-way distributor ¹⁾	• without radio telecontrol	65 g
208 050 020 51	Flush-mounted touch-remote-control to dim and switch	• as extension to existing controller	20 g
615 000 506 31	4 channel radio telecontrol black	• max. 7 different radio transmitter can be used with one controller	65 g
615 000 506 01	Mounting radio telecontrol to dim stainless steel	• each radio transmitter can be parallel semi-skilled on random controller	40 g
615 000 506 21	Recessed radio telecontrol to dim stainless steel		15 g
208 050 030 01	24V Dim-controller 1-10V 80W with 12-way distributor	• dim control cable 0,3m with Mini AMP-plug / dim current < 1 mA	80 g
615 000 505 11	24V Dim-controller DALI 120W with 12-way distributor	• dim control cable 0,3m with ferrules	125 g
615 000 509 03	24V Dim-controller 2 WiFi 100W with 12-way distributor	• operating distance 50 m • less for walls and ceilings	110 g
615 000 514 01	24V Dim-controller ZigBee 100W with 12-way distributor	• list with compatible systems under www.hera-online.de	80 g
208 050 030 41	24V Dim-controller Sonar 48W with 11-way distributor	• dim control cable 2,5 m • incl. screw and adhesive strip	70 g
Accessories:	LED transformers 24 V from page 136		

¹⁾ only radio controller versions (mounting / recessed)