



SlimLite® CS Seamless

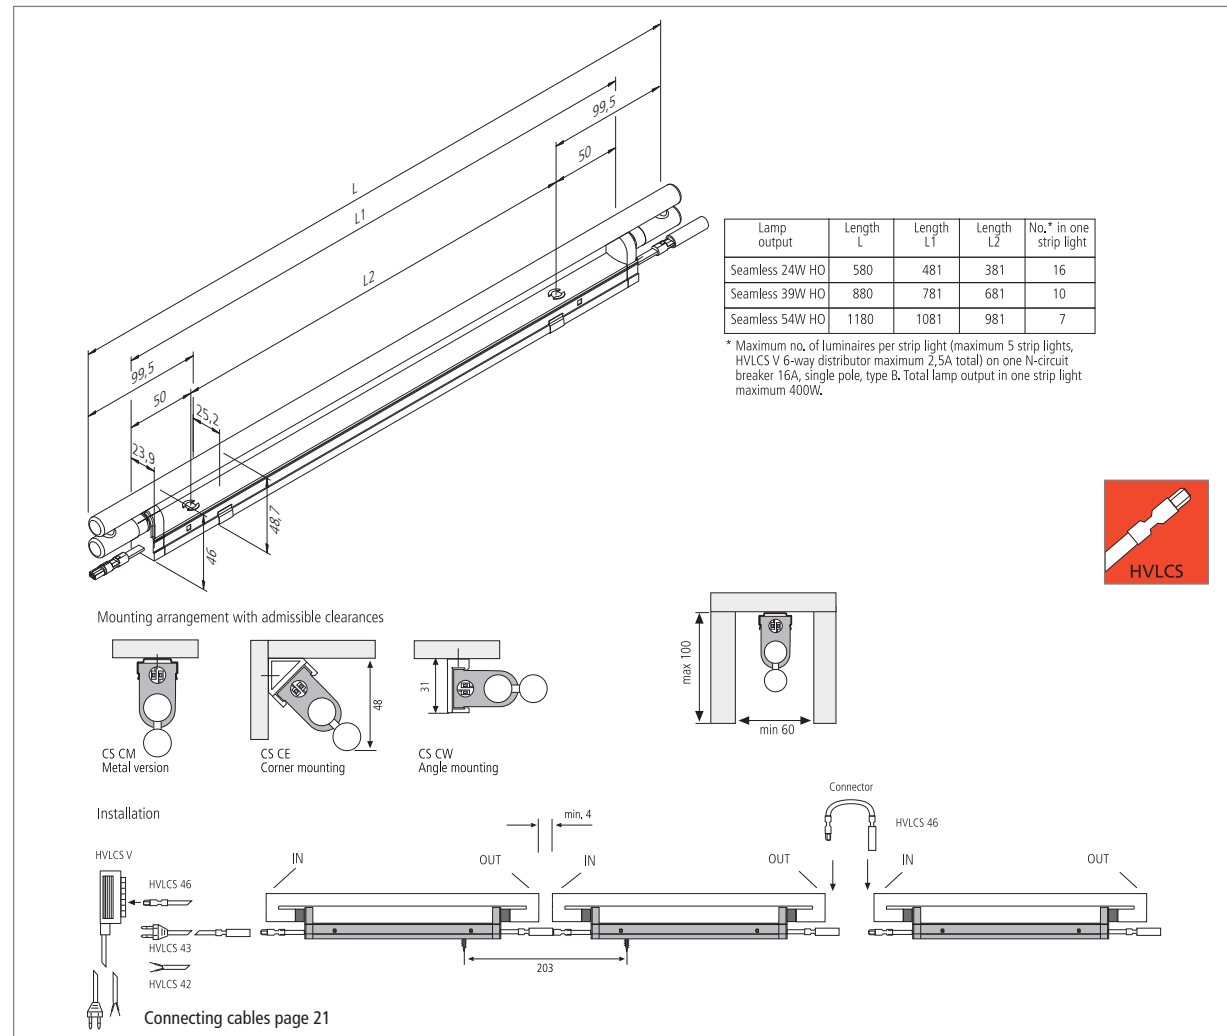

SlimLite® CS Seamless

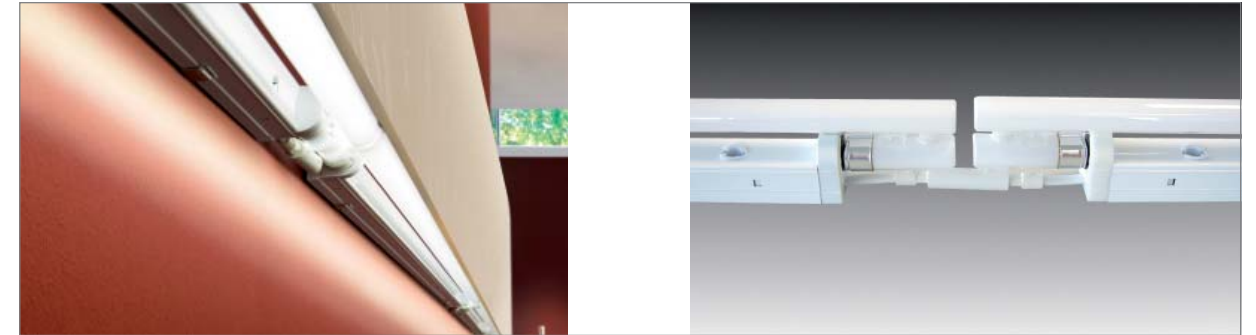

Compact luminaire with aluminium casing without Dark Zones

- Application:** suitable for shopfittings, counters, shelving units, display cabinets, behind lighting screens etc. without dark zones
- Connection:** 220 – 240V / 50 – 60Hz
- Lamp:** extremely long-life T5 (ø 16mm) **Seamless high output** fluorescent lamp, ø life 12,000 hours
- Energy efficiency:** good - very good, 73 - 82lm/W (24 - 54W)
- Colour rendering:** good, Ra = 80 – 89
- Special features:** flicker-free instant start and energy-saving and suitable for frequent on/off switching via an electronic ballast; vertical plug-in system allows later removal from the strip light; many accessories; „screw-through“ ability for mounting without any extra clips.

The SlimLite® CS Seamless is the ideal lighting system for creating long, seamless light-bands, with virtually no dark spots. This model can be adapted to any room layout, is available in three different lengths and therefore offers an endless range of design possibilities. Depending on the output of each lamp, a total of 7 to 16 lamps can be linked up. Another advantage of this system is that it can be screwed in, making the installation easy as child's play without the use of additional clips.

Article No.	Description	Illustration	Features	Approx. weight.
501 153 300 00	SlimLite CS Seamless 580 mm 24W HO		<ul style="list-style-type: none"> please order T5 Seamless HO lamps separately „screw-through“ aluminium casing incl. mounting clip CS CM 	260 g
501 153 400 00	SlimLite CS Seamless 880 mm 39W HO		50 g	
501 153 500 00	SlimLite CS Seamless 1180 mm 54W HO		475 g	
201 010 121 11	Fluorescent lamp T5 HO 24W/830 ww Seamless		<ul style="list-style-type: none"> L = 580mm Luminous flux max.: 1750lm 	50 g
201 010 121 01	Fluorescent lamp T5 HO 24W/840 cw Seamless		50 g	
201 010 121 12	Fluorescent lamp T5 HO 39W/830 ww Seamless		<ul style="list-style-type: none"> L = 880mm Luminous flux max.: 3100lm 	75 g
201 010 121 02	Fluorescent lamp T5 HO 39W/840 cw Seamless		75 g	
201 010 121 13	Fluorescent lamp T5 HO 54W/830 ww Seamless		<ul style="list-style-type: none"> L = 1180mm Luminous flux max.: 4450lm 	105 g
201 010 121 03	Fluorescent lamp T5 HO 54W/840 cw Seamless		105 g	
202 040 103 41	CS CM mounting clip metal version		<ul style="list-style-type: none"> 2 clips and 2 screws 	20 g
202 040 103 42	CS CE mounting clip corner mounting 45°		<ul style="list-style-type: none"> 3 clips and 6 screws 	20 g
202 040 103 43	CS CW mounting clip angle mounting 90°		20 g	
Accessories:	Connecting cables page 21			